




Glass roof awning



Ancona

Just
enjoy life!

Lewens
MARKISEN

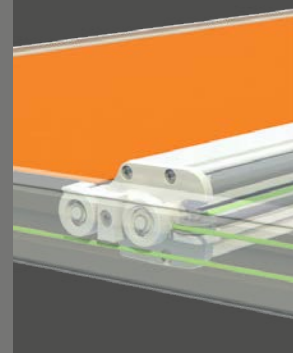



Vario Valance

[optional for Interior type]

Especially when the sun is low in the sky, the Vario Valance offers variable shade and privacy. The valance can be extended and retracted independently of the awning.



Ancona glass roof awning

With optional Vario Valance for maximum comfort



Interior type

– for interior mounting on the rafters of the glass roof or conservatory, specially developed for freely suspended installation below a protective glass roof.




Below or above

- Width max. 600 cm, height max. 450 cm [depending on type and equipment]
- Electric motor
- Comfort options:
Radio motor/radio remote control,
automatic weather sensor,
radiant heater,
Vario Valance [only Interior type]

Types to choose from:

- **Interior** for installation below a protective glass roof
- **Roof-mounted** for fitting on a conservatory or glass roof, including roof cover

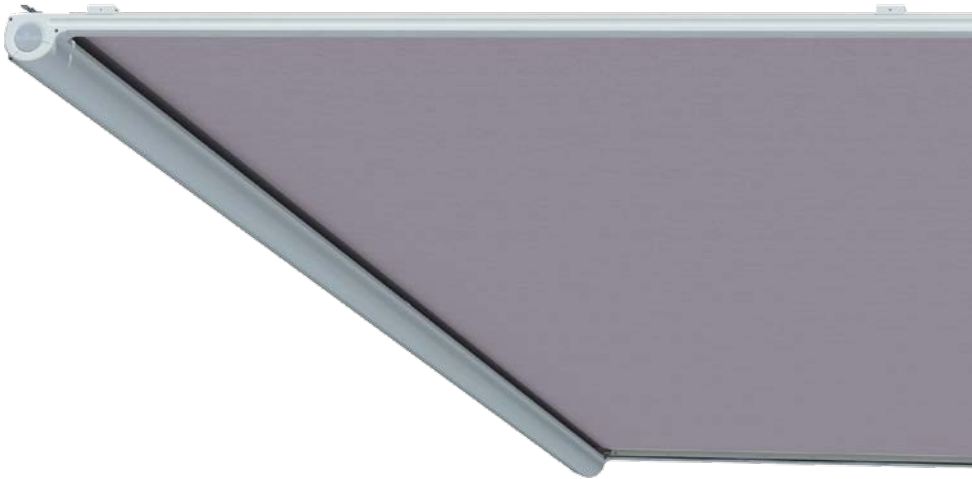

The front drop can be adapted with centimetre accuracy to the rafter length of the glass roof or conservatory.

Whether fitted below or above the glass, the Ancona glass roof awning is the perfect solution for anyone who wishes to enjoy the conservatory or glass roof all year round and wants a practical, easy-care sunshade. The Interior model ensures that the awning remains dry, clean and safely protected from wind and weather damage. For roof mounting the Ancona awning is equipped with a protective roof cover.

Roof-mounted type

– for attachment from above to the rafters of the glass roof or conservatory.
Since the awning is exposed to the effects of the weather, this awning type is always supplied with a protective roof cover.



Roof cover

– standard for Roof-mounted type
– optional extra for Interior type
Turns the awning casing into a cassette that protects the fabric and mechanism.



Ancona

Equipment and technical features



Manufactured and assembled in Germany



Quality and engineering conform to CE standard

Type	Interior	Roof-mounted
Installation height <i>[incl. standard mounting]</i>	154 mm	175 mm
Panel widths <i>[max.]</i>		
1-piece <i>[single panel]</i>	600 cm	600 cm
Drop <i>[max.]</i>		
Depth <i>[incl. cassette and deflection roller]</i>	450 cm	450 cm
Drive		
Electric motor <i>[for wall switch]</i>	■	■
Radio motor <i>[io or RTS]</i>	□	□
Frame colours		
17 RAL colours + 6 textured finishes <i>[Lewens standard colours]</i>	■	■
Special RAL, special colours and effect finishes	□	□
Awning fabrics <i>from the Lewens collection</i>		
Branded acrylic <i>[spun-dyed, extremely colourfast]</i>	■	■
Branded polyester <i>[spun-dyed, extremely colourfast]</i>	□	□
Tenara quality sewing yarn	■	■
Options		
1 Radio motor + radio remote control	io/RTS □	io/RTS □
2 Automatic weather sensor	Sun □	Sun, wind, rain □
3 Radiant heater <i>[only for wall attachment]</i>	□	□
4 Extra fabric support wire	□	□
5 Roof cover	□	always included! ■
6 Vario Valance <i>up to 400 cm wide, with hand crank – [not with 3]</i>	□	–
Attachment		
Interior mounting	■	–
Roof mounting	–	■
Installation materials		
Rail holders <i>[without mounting screws/plugs]</i>	■	–
Mounting feet, size 10 <i>[without mounting screws/plugs]</i>	□	■
Additional installation materials	□	□

Please note:

Due to the design and the weight of the awning fabric, the fabric may sag to some extent in the centre on large panel widths. However, this has no effect on the operation and/or service life of the awning.

■ Standard □ Option – Not available

Please refer to the technical data in the latest Lewens price list for possible dimensions and restrictions as well as the complete range of electronic accessories.

Your specialist dealer will be happy to advise you:



www.lewens-markisen.de

Subject to technical modifications. Date: 03/2018